
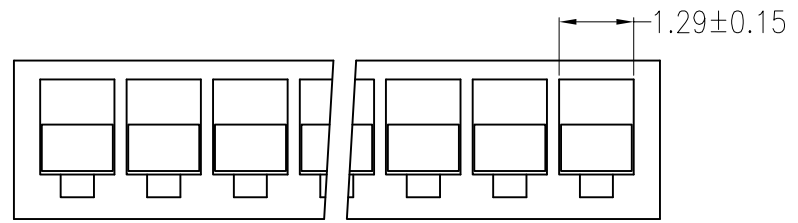



REV	DESCRIPTION	DESIGN	DATE
A0	Release	蒋建银	2018.01.18

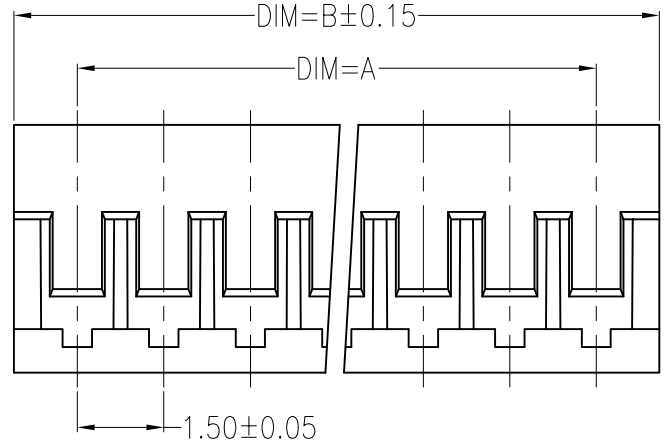

主要技术参数 Main Specifications

线 数 (Poles): 02 to 20
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
 额定电压 (Rated voltage): 250V AC DC
 额定电流 (Rated current): 1.0A AC DC
 耐 电 压 (Withstand Voltage): 500V AC/minute
 温度范围 (Temperature Range): $-25^{\circ}C \sim +85^{\circ}C$

ORDER INFORMATION:

B1502Y--A5W-P**

PART No. _____
 No. OF CIRCUITS: _____
 PACKAGING: P=PE
 PLASTIC MATERIAL: A5W=PA66 (WHITE)

Circuits	Dimensions (mm)		Circuits	Dimensions (mm)	
	DIM=A	DIM=B		DIM=A	DIM=B
02	1.50	3.70	10	13.50	15.70
03	3.00	5.20	11	15.00	17.20
04	4.50	6.70	12	16.50	18.70
05	6.00	8.20	13	18.00	20.20
06	7.50	9.70	14	19.50	21.70
07	9.00	11.20	15	21.00	23.20
08	10.50	12.70	16	22.50	24.70
09	12.00	14.20	17	24.00	26.20
10	13.50	15.70	18	25.50	27.70
11	15.00	17.20	19	27.00	29.20
12	16.50	18.70	20	28.50	30.70

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
A	PEDESTAL	1 PCS	PA66	COLOR:Beige

JKUN 温州健坤接插件有限公司 WENZHOU JKUN CONNECTOR CO.,LTD.		TITLE: - 1.5mmPITCH Housing	
X.±0.5	X.±5'	USE:	PART NO.:
.X±0.3	.X±2'	CUSTOMER	B1502Y-**-A5W-P
.XX±0.25	.XX±1'	APPD: 邵敬和	DWG NO.:
--	--	CHKD: 田峰	JKUN/GCCP-0584
⊕	UNITS: mm	DR: 蒋建银	SCALE: 1 : 1
			SHEET: 1 / 1