

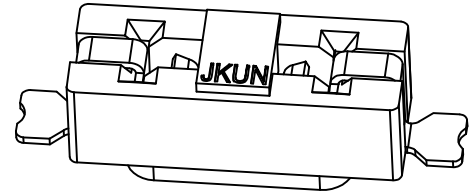
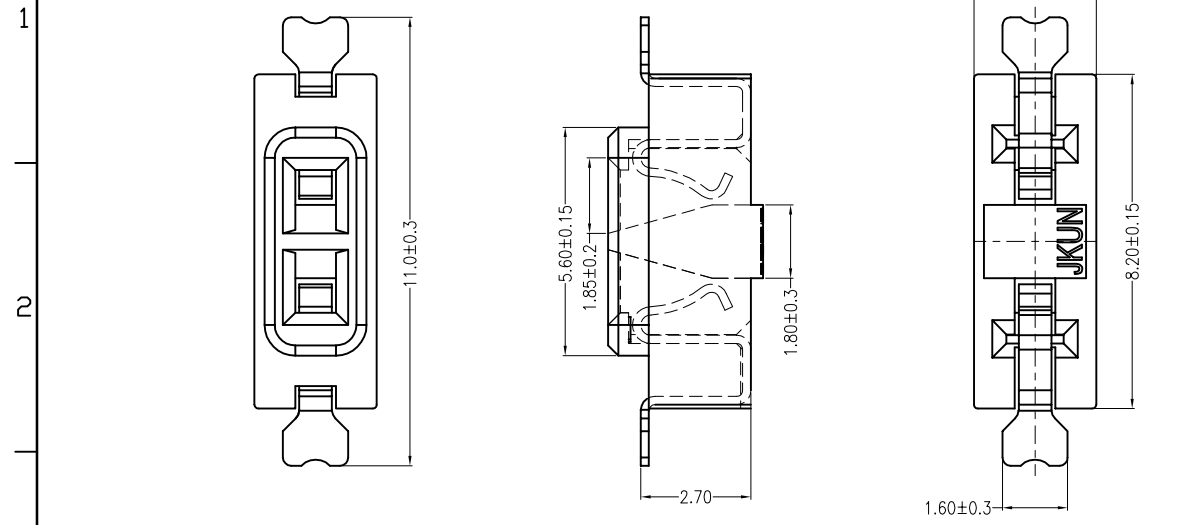


REV	DESCRIPTION	DESIGN	DATE
A0	Release	吴丹平	2016.04.30

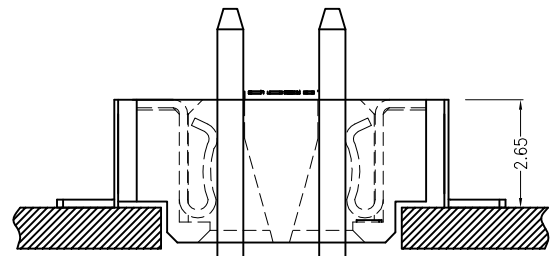


主要技术参数 Main Specifications

- 线 数 (Poles): 02
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
- 额定电压 (Rated voltage): 125V AC DC
- 额定电流 (Rated current): 1.0A AC DC
- 耐 电压 (Withstand Voltage): 1500V AC/minute
- 温度范围 (Temperature Range): $-40^{\circ}C \sim +120^{\circ}C$




ORDER INFORMATION:

L039Y-02-F2MB-R			
PART No.			PACKAGING:
No. FOR CIRCUITS:			P=PE
02			R=REEL
PLASTIC MATERIAL:			PLATING:
F2M=LCP (BEIGE)			B=MATTE Sn

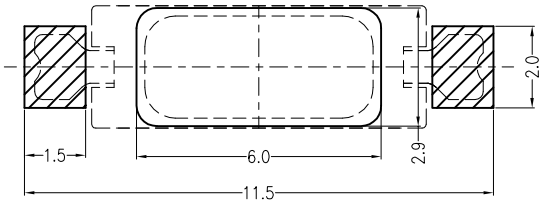

Board Layout
General Tolerance: ± 0.05



Assembly Layout

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
C				
B	CONTACT	2 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

JKUN 温州健坤接插件有限公司
WENZHOU JKUN CONNECTOR CO., LTD.

TITLE: -
2.5mmPITCH 180°WAFER SMT TYPE

X.±0.5	X.±5°	USE:	CUSTOMER
.X±0.3	.X±2°	APPD:	邵敬和
.XX±0.25	.XX±1°	CHKD:	田峰
--	--	DR:	吴丹平
UNITS: mm			

PART NO.:		L039Y-02-F2MB-R	
DWG NO.:		JKUN/GCCP-0065	
SCALE	SHEET		
1 : 1	1 / 1		